

**Domestic Zapper Insect Control**

**Please read these instructions carefully and store in a safe place for future reference.**

**FLYLITE™**

As part of the P+L brand of insect control products, **Flylite™ 6** is a portable and compact flykiller with a traditional lantern aesthetic. **Flylite™ 6** is ideal for use in domestic environments, either installed in a fixed location such as kitchens, conservatories or utility areas, or for use in temporary applications, such as during BBQs or other outdoor meals.

**Contents of package**

- 1 x Flylite™ 6 flykiller
- 1 x Suspension keyrings and chain
- 1 x High powered UV tube (Fitted)

**INSECT CONTROL PRODUCTS**

**Flylite™ 6** utilises a high powered ultra violet tube to attract flying insects, then zaps them using a high voltage killing grid. Caught insects are then held within a removable catch tray.

**POSITIONING**

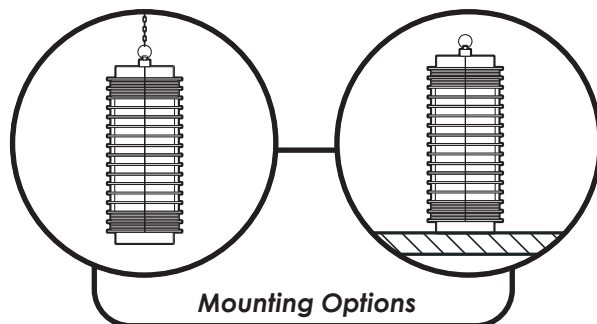
THIS UNIT IS NOT INTENDED FOR FIXED OUTDOOR APPLICATIONS.

**Flylite™ 6** should ideally be mounted around two meters above the ground, preferably in the darkest place within the area to be protected. Do not position the unit close to windows, skylights or other sources of light, or where it may be obscured by furniture, doors or other obstacles. Ideally, **Flylite™ 6** units should be visible from every part of the area to be protected.

**INSTALLATION**

PRIOR TO INSTALLATION, ENSURE THE POWER SUPPLY OF YOUR MAINS OUTLET CORRESPONDS TO THAT MARKED ON THE SPECIFICATION LABEL FOUND ON THE FLYKILLER.

**Flylite™ 6** can either be mounted on a horizontal surface or suspended as shown in the mounting options section of this document.


**Mounting Options**
**CLEANING**

ENSURE THAT THE FLYING INSECT KILLER IS DISCONNECTED FROM THE MAINS BEFORE CLEANING

It is recommended that cleaning is carried out regularly. Once disconnected from the power supply, the unit should be thoroughly wiped down with a damp cloth, removing any build up of dirt. Ensure the unit is completely dry before reconnecting it to the power supply.

**GUARANTEE**

**Flylite™ 6** has a one year guarantee and if maintained as recommended in these instructions should continue to work for many years.\* Use of non-approved consumables may invalidate the guarantee.

\*Excludes tubes. Does not cover breakdown due to misuse, incorrect operation or use in an incorrect application.

**TRAY REMOVAL**

BEFORE CLEANING THE CATCH TRAY, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

The catch tray should be emptied when full and the caught flying insects disposed of hygienically.

To remove the catch tray...

1. Rotate catch tray through 90° anti-clockwise.
2. Pull the catch tray free from the unit.

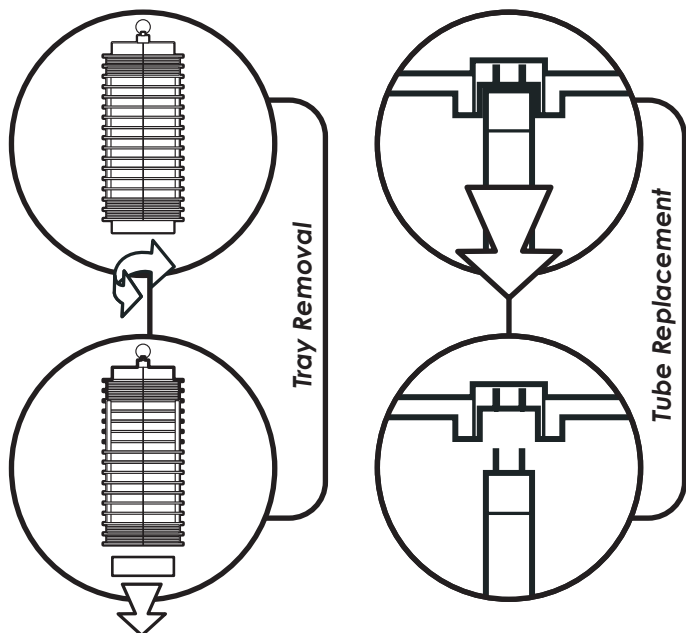
**TUBE REPLACEMENT**

BEFORE REPLACING THE TUBE, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

To ensure the efficiency of **Flylite™ 6** in catching flying insects, the UV tube should be replaced annually. After twelve months the phosphor coating that emits the correct wavelength of UV light has burnt away and the UV output is diminished substantially.

To replace the UV tube...

1. Remove the catch tray as described above.
  2. Unclip the tube cables from the end of the tube.
  3. Pull the tube away from the chassis.
- Dispose of the used UV tube in conjunction with local WEEE regulations.


**SPECIFICATION / REPLACEMENT PARTS**

<b>Unit</b>	Flylite 6	<b>Weight</b>	0.5 Kg
<b>Voltage</b>	230V ~ 50Hz	<b>Light Output</b>	6W
<b>Dimensions(mm)</b>	130 x 130 x 328	<b>Tube</b>	1 x I617
<b>Coverage</b>	25 Sq. Meters		